

V6C



REFEREE COMMUNICATION BLUETOOTH INTERCOM

About the host:



Waterproof rating: IP65
 Operating voltage: 3.3V-4.2V
 Operating temperature range: -30 °C to +60 °C
 Intercom distance: up to 1200meters (Undisturbed environment)
 Charging specifications: 3.5mm Round hole Charging (5V 0.5-2A)
 Charging time: 2.5H


Bluetooth version: 3.0
 Chip: BC5
 Battery capacity: 850mAh
 Battery type: polymer
 Talk time: 12H
 Standby time: 400H

Attentions:

1. Please use the standard charger to ensure the battery life.
2. For the sake of your safety, we do not recommend listen to music while riding on the road.
3. Don't randomly press the power button when you're riding. For your own safety, pls keep riding at the safe distance.
4. To prevent V6C from rain and water, the headset should be fully inserted in.

After-sales service:

1-year warranty after delivery.
 If there is a quality problem, pls send the product back for maintenance test.
 Any questions, pls feel free to contact us!

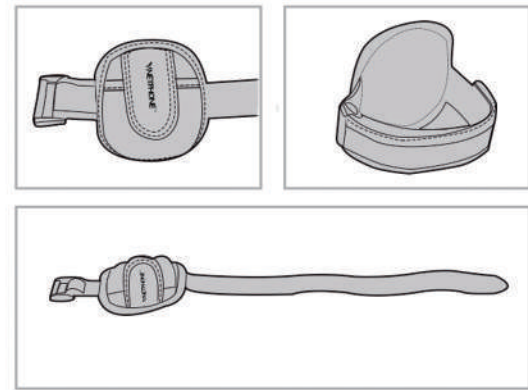

Connection Method:
 Let's mark six V6C as ①②③④⑤⑥, pls refer to the pictures below.
Step 1: Connect ① with ②, keep pressing of ① ② for 5 seconds till the indicator light goes red and blue.
Step 2: Press of ①, when the indicator light of ① ② both go blue, the pairing is successful.
Step 3: When you confirm the connection between ① ② is done, press of ① once, communication would be available when the two devices both flash blue at the same rhythm.

V6C is an intercom up to 6 people in a large group and talk between any 2 of them.
 To connect the other four V6C, just repeat the pairing method mentioned above, but replace the power button as button B/C/D/E.

- For reference:
 ① ②: button A (power button)
 ① ③: button B
 ① ④: button C
 ① ⑤: button D
 ① ⑥: button E



Packing includes:



Functions:

- 1. Power on/Power off**
 Power on : press for 2 seconds till the indicator goes blue
 Power off : press (the power off) button once
- 2. Last number redial**
 First, make sure you've connected your mobile phone with the V6C.
 Second, press three seconds.
- 3. Answer phone calls**
 V6C answer phone calls automatically when it keep ringing for 5 seconds or so.
- 4. Refuse phone calls**
 Press to reject a phone call.
- 5. Play/pause music**
 Press to play or pause a song.
- 6. Volume control**
 Louder the volume, press
 Lower the volume, press
- 7. Previous/Next Song**
 Keep pressing for 2 seconds to play the previous song.
 Keep pressing for 2 seconds to play the next song.
- 8. Charging prompt**
 Charging: red light
 Fully Charged: lights off
- 9. Delete pairing memory**
 Press both and for 3 seconds. Pairing memory was deleted when the indicator goes red.

