

EJEAS-E2



www.EJEAS.com

User manual

Distribution:



①: Button 1:

Volume +/-

Music Play/Pause

Rejecting a mobile phone call

Voice dialing

Redial the last number

②: Button 2:

Power ON/OFF

Pairing

③: LED Indicator Light


RED

BLUE



④: Earphone and charge plug

4

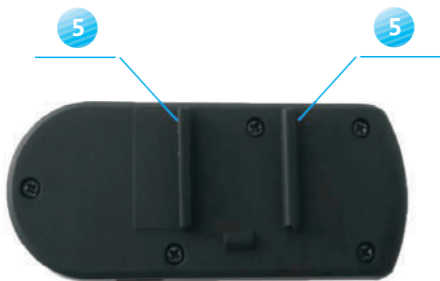

⑤: Deck



Installation instruction



Clamp installation Step 1: Pinch clip buckle, fasten it



Clamp installation Step 2: Another side make same as Step 1



Open the clamp, clamp around edge of the helmet



Pinch clip buckle, and take it off



Install bluetooth interphone onto the clamp under instruction



Finished installation



The location of the installation of headphones and mic



Earphone line connecting instruction

Power on:

Long press Button 2 about 2S, blue light on, voice prompt 'Power on'.

Power off:

Press Button 2 and Button 1 approximately 0.2S at the same time, the red light on, the voice prompt "Power off".

Pair with cell phone:

In the power off state, long press Button 2 about 7S, red and blue lights flashing alternately. Open the bluetooth searching of cell phone, Pairing, voice prompt 'Pairing'.

Connect mobile:

when power on, it will automatically connect mobile phone, if not, short press Button 1, to make it connect mobile phone.

Voice Dial:

In the state of power on and connected mobile phone, quick twist Button 1 twice to the right.

At the end of the code redial:

In the state of power on and connected mobile phone, quick twist Button 1 twice to the left, prompt "Redialing".

To answer phone call:

When calling, it will automatically receive the phone call after 8s, in the case of a call, short press Button 1 to answer.

Refused to answer phone call:

when there is Calls, within 8S, double-click the Button 1 refused.

End phone call:

During the call, short press Button 1 hang up.

Music play/pause:

Short press Button 1.

Music and song adjust:

In the music playing state, quick twist Button 1 twice to the left or right.

Volume:

In the state of intercom, calls, music, twist the button 1 to the left or right adjust the volume.

The device pair with second EJEAS_E2 intercom:

In power on state, the first EJEAS_E2 long-press Button 2 about 5s, enter a state of slow alternating red and blue flashing, second EJEAS_E2 long-press Button 2 alternating red and blue slow flash 5s into the state, and then a short press the first EJEAS_E2's Button 2, pairing is established. After the success of the pairing, Led light return to standby mode.

The device pair with third EJEAS_E2 intercom:

In power on state, the first EJEAS_E2 long-twist Button 1 to the right about 5 s, enter a state of slow alternating red and blue flashing, third EJEAS_E2 long-press Button 2 alternating red and blue slow flash 5 s into the state, and then a short twist the first EJEAS_E2's Button 1 on the right, pairing is established. After the success of the pairing, Led light return to standby mode.

The device pair with fourth EJEAS_E2 intercom:

In power on state, the first EJEAS_E2 long-twist Button 1 to the left about 5 s, enter a state of slow alternating red and blue flashing, fourth EJEAS_E2 long-twist Button 1 to the left alternating red and blue slow flash 5 s into the state, and then a short twist the first EJEAS_E2's Button 1 to the left, pairing is established. After the success of the pairing, Led light return to standby mode.

The device pair with Other brand intercom:

In power on state, the first EJEAS_E2 long-press Button 2 about 7 s, enter a state of slow alternating red and blue flashing, Other brand intercom into the pairing state, and then a short press the EJEAS_E2 Button 2, pairing is established. After the success of the pairing, Led light return to standby mode.

Entry the intercom with the second EJEAS_E2

Click the Button 2.

Entry the intercom with the third EJEAS_E2

Long twist Button 1 to the right about 1 s

Entry the intercom with the fourth EJEAS_E2

Long twist Button 1 to the left about 1 s

Entry the intercom with other brand intercom

Double-click the Button 2

Exit the intercom

Short press Button 2

Clear all matching records

Press Button 2 and twist Button 1 to the right about 0.2 S at the same time, clear all matching records.

Low power indication

Every 90s reminder "Bettery Low"

Power Reserve Indicator

When charging light flashing , fully charge the light off .

Accessories:



Earphone



Clamp connected



USB charger

